



Spring 2026 Release

When it Absolutely Must Connect

## SX-SDMAX6E

Tri-Band Connectivity: Wi-Fi 6/6E & Bluetooth® Combo Module

(2.4/5/6 GHz) | SDIO Interface


Optimized for low power and reliable performance

### Product Overview

The SX-SDMAX6E is a tri-band Wi-Fi 6E + Bluetooth® v5.4 combo module engineered for medical, industrial, and mission-critical embedded applications where reliable, low-latency wireless connectivity is essential. Powered by NXP's IW623 chipset, the module delivers 2x2 high-speed performance for demanding applications such as image and video streaming, while also supporting 1x1 low-power operation to maximize battery life in portable or wearable devices.

### Key Features & Benefits

#### Low Power SDIO Interface

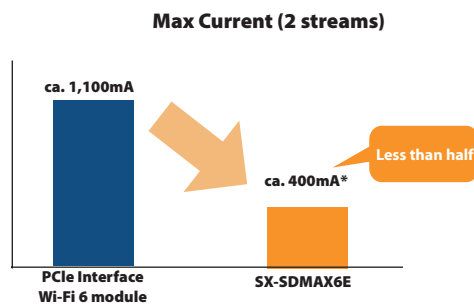


- Utilizes the SDIO 3.0 host interface for efficient integration and reduced power consumption in embedded and portable systems.
- Delivers stable, high-performance connectivity, in congested Wi-Fi conditions and supports smooth roaming for mobile devices.

#### Reliable Wireless Performance



- Supports Wi-Fi 6E (6 GHz band), providing interference-free communication and increased capacity in congested environments.
- IEEE.802.11k/v/r fast roaming ensures seamless transitions between access points, maintaining stable connectivity while on the move.

#### Configurable Antenna Options

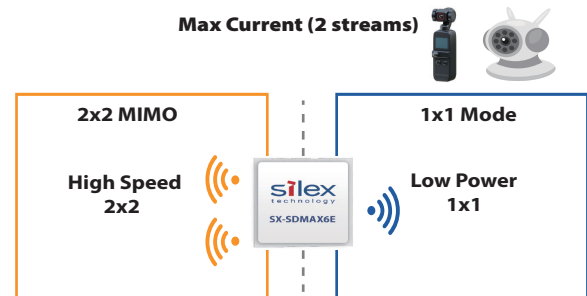

- 2X2 MIMO Mode: Supports high data throughput for demanding applications such as video streaming and image transfer.
- 1x1 Mode: Optimized for low power consumption, reducing energy use to less than half of 2x2 operation, ideal for portable battery-driven devices.

#### Wi-Fi and Bluetooth Integration



Combines Wi-Fi 6E and Bluetooth® 5.4 in a single combo module with a dedicated Bluetooth antenna for simultaneous communication.

Consolidates Wi-Fi and Bluetooth functionality within a single tri-band module, optimizing PCB real-estate, simplifying RF design and reducing BOM complexity.

# Wi-Fi 6/6E & Bluetooth® Combo Module

# SX-SDMAX6E

## Specifications

<b>Product Name</b>	SX-SDMAX6E-2530S SX-SDMAX6E-M2
<b>Chipset</b>	NXP IW623
<b>Host Interface</b>	WLAN: SDIO3.0 Bluetooth®: UART
<b>Wi-Fi Standard</b>	IEEE 802.11a/b/g/n/ac/ax (1x1 or 2x2)
<b>Frequency</b>	2.4 GHz, 5 GHz, 6 GHz
<b>Bandwidth</b>	(2.4 GHz): 20MHz/40MHz (5 GHz): 20MHz/40MHz/80MHz (6 GHz): 20MHz/40MHz/80MHz
<b>Bluetooth®</b>	Bluetooth® v5.4
<b>Antenna Connector</b>	SX-SDMAX6E-2530S: RF PAD SX-SDMAX6E-M2: MHF1 3 connectors
<b>Operating Voltage</b>	SX-SDMAX6E-2530S: Main Power Supply: 3.3V + 1.8V IO Power Supply: 3.3V or 1.8V  SX-SDMAX6E-M2 Main Power Supply: 3.3V
<b>Operating Environment</b>	Temperature: -40~+85°C Humidity: 15~80%RH (without condensation)
<b>Storage Conditions</b>	Temperature: -40~+90°C Humidity: 10~85%RH (without condensation)
<b>Dimensions</b>	SX-SDMAX6E-2530S: 17x18x2.65mm SX-SDMAX6E-M2: 22x30.0x4.45mm
<b>Form Factor</b>	SX-SDMAX6E-2530S: 49-pin LGA (Direct Solder) SX-SDMAX6E-M2: M.2 Card Type 2230-S3-E

## Quality & Longevity

Designed, developed and manufacturer in Japan at Silex's Keihanna headquarters, the SX-SDMAX6E reflects our commitment to exceptional quality and reliability. Backed by over 20 years on industrial wireless expertise, Silex delivers products built to perform in demanding environments. We also ensure long-term supply continuity through careful component lifecycle management, supporting our customer's needs throughout their product lifecycles.



## Driver & Development Support

**NXP**  
Gold  
Partner

As an NXP Semiconductors Gold Partner, Silex has collaborated closely with NXP from the early development of the IW623 chipset. This partnership allows us to deliver optimized driver software that enhances performance, stability, and ease of integration.

To accelerate your evaluation process, Silex offers:

- free drivers for the reference program platform
- comprehensive support for software, hardware, wireless certification, and production

\*Product evaluation kit details will be announced in 2026.

## Product Lineup



**SX-SDMAX6E-2530S**  
(Surface Mount)



**SX-SDMAX6E-M2**  
(M.2 Connector Type)

### Silex Global Sales & Support Locations



**US Office**  
silex technology america, Inc.  
+1-657-218-5199  
www.silextechnology.com  
sales@silexamerica.com

**Europe Office**  
silex technology europe, GmbH  
+49-2154-88967-0  
Germany toll free 0800-7453938  
www.silextechnology.com  
sales@silexeurope.com

**China**  
silex technology China, Inc.  
+86-10-64403958/57  
support@silex.com.cn

**Corporate Headquarters**  
silex technology, Inc.  
+81-774-98-3781  
www.silex.jp  
support@silex.jp

