

# SX-PS-3200P Setup Guide

English

silex  
technology

## Thank you very much for purchasing SX-PS-3200P.

This Setup Guide provides information on how to configure and use SX-PS-3200P in your network environment. Please follow the instructions on **Step1-3** to configure SX-PS-3200P.

Before you begin, please carefully read the "Safety Instructions" in the online manual included in the CD-ROM.



- (De) Auf der CD-ROM befindet sich ein deutschsprachiges Setup-Handbuch im PDF-Format. Zum Anzeigen der PDF-Datei unter Windows benötigen Sie den Adobe Reader.
- (Fr) Un guide d'installation en français au format PDF est inclus dans le CD-ROM. Adobe Reader est nécessaire pour lire les fichiers PDF dans un environnement Windows.
- (It) Una Guida alla configurazione in italiano è inclusa nel CD-ROM come file PDF. Per visualizzare il file PDF in ambiente Windows è necessario Adobe Reader.
- (Es) En el CD-ROM se incluye una Guía de instalación en español como archivo PDF. Se necesita Adobe Reader para ver el archivo PDF en un entorno Windows.
- (Pt) Um Guia de Configuração em português é fornecido no CD-ROM no formato de arquivo PDF. É necessário ter o Adobe Reader para visualizar o arquivo PDF em um ambiente Windows.

## Package Contents

Please confirm the following items are bundled with SX-PS-3200P.

- |  |  |
|--|--|
| <input type="checkbox"/> SX-PS-3200P               | <input type="checkbox"/> Setup Guide (this document) |
| <input type="checkbox"/> AC Adaptor                | <input type="checkbox"/> Warranty Booklet            |
| <input type="checkbox"/> CD-ROM (SX User Software) |  |

## User Registration



Please complete user registration after you finish the setup. User registration is required to provide you better technical support and services.

User Registration Website

<http://www.silex.jp/register/>

For user registration, a Serial Number is required. The Serial Number is the last 6-digits of the Ethernet Address(12-digits total) which can be found on the bottom of the unit.

Example: If the Ethernet Address is "00:80:92:00:11:22", the Serial Number will be "001122".

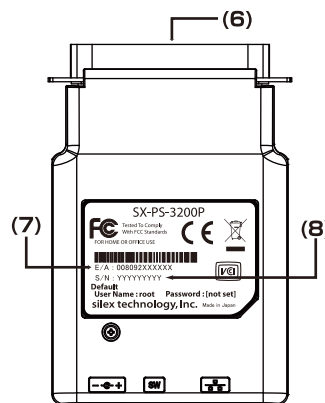

- (1) LINK LED
- (2) STATUS LED
- (3) Network port
- (4) Push switch
- (5) Power connector
- (6) Serial port
- (7) Ethernet address
- (8) Serial Number

How to connect SX-PS-3200P to a printer and then to a network HUB is explained.

\* Before you begin, finish the installation of the printer driver you wish to use. For the printer port, select "LPT1".

- 1** The following items are required:



Ethernet HUB Network cable

\* If SX-PS-3200P has been used in another network, reset it to the factory default first. (See the instruction on the right.)


- 2** Connect SX-PS-3200P to a parallel interface port on the printer (①).

- 3** Connect SX-PS-3200P to a network HUB via a network cable (②).

- 4** Connect the AC adapter to SX-PS-3200P (③) and plug it into a power outlet (④).


\* Please be sure to use the AC adapter that came with SX-PS-3200P.

- 5** Power on the printer (⑤).

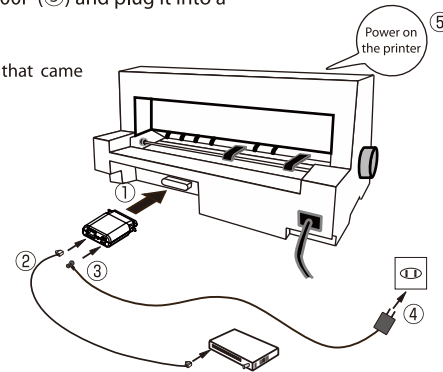

## Factory Default Configuration

- 1** Remove the AC plug from the power outlet (①).
- 2** Push and hold the push switch with a fine tipped object such as a pen or pencil (②) while inserting the AC plug into an outlet (③). Keep holding for a while and release the push switch when the STATUS LED (Orange) turns on (④). The factory default configuration will start then.
- 3** When the STATUS LED (Orange) and the LINK LED (Green) turn on for 1 sec, the factory default configuration is complete (⑤).

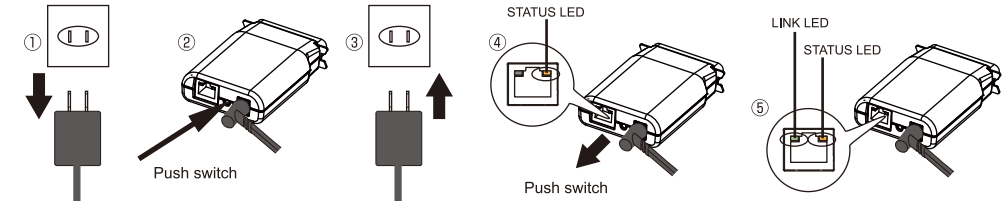

## Step2 IP Address Configuration

Use the easy configuration utility included in the CD-ROM (**SX User Software**) to configure the IP address to SX-PS-3200P.

\* Please temporarily disable any security software (e.g. "Norton", "McAfee", etc.) during the setup.

For how to disable the security software, see the FAQ on our website (<http://www.silexamerica.com/>).

- 1** Insert the CD-ROM (**SX User Software**) into your PC. Click **Quick Setup**.




\* If the menu screen does not appear automatically, open **My Computer**, select the CD-ROM drive and execute **Autoun.exe**.


\* In Windows 7, the User Account Control screen is displayed. Click **Yes**.

\* In Windows Vista, the User Account Control screen is displayed. Click **Continue**.


- 2** Click **Yes**.




- 3** Read the displayed information and click **Next**.




- 4** Read the software license agreement and click **Yes**.



- 5** Select SX-PS-3200P and click **Next**.



- 6** Click **Assign IP Address**, enter IP address, subnet mask and default gateway, and click **Next**.




\* The screen may vary depending on the OS you are using.

If it's not listed...

- Confirm that SX-PS-3200P is connected to a network HUB using a proper network cable (straight through cable).
- Check that the network setting (IP address setting) is properly configured on your PC.
- Disable any security software if it is enabled.


\* Please note that the DHCP server may assign a different IP address every time SX-PS-3200P is booted. If the IP address of SX-PS-3200P is changed, network printing will no longer be available. If you wish to manage the IP address using the DHCP server, you need to configure it to always assign the same address to SX-PS-3200P.

- 7** Please confirm the configuration parameters and click **Execute**.



\* The information displayed here will vary depending on the configuration you selected.

- 8** Click **Yes** and then click **Finish**.



**The IP address has successfully been configured to SX-PS-3200P.**


The installer of SX-Print will run. Go on to **Step3-3** on the back.

For any problems regarding the setup, see **Troubleshooting** on the back.

## Step3 Application Installation and Printing Setting

- 1** Insert the CD-ROM (**SX User Software**) into your PC.


- 2** Click **Application Installation**.




\* If the menu screen does not appear automatically, open **My Computer**, select the CD-ROM drive and execute **Autorun.exe**.  
\* In Windows 7, the User Account Control screen is displayed. Click **Yes**.  
\* In Windows Vista, the User Account Control screen is displayed. Click **Continue**.

Install the printing client software contained in the CD-ROM (**SX User Software**) and configure the printing setting to allow network printing from your PC.


- 3** Read the displayed information and click **Next**.




- 4** Read the software license agreement and click **Yes**.




- 5** Click **Next**.




- 6** Click **Next**.




- 7** Click **Start**.




- 8** Click **Yes** and then click **Finish**.




- 9** Click **Next**.



- 10** Select **Print with LPR (Line Printer Remote)** and click **Next**.




- 11** Click **Searching Print Server**. In the window that pops up, select SX-PS-3200P and click **OK**. When returned to the wizard, click **Next**.

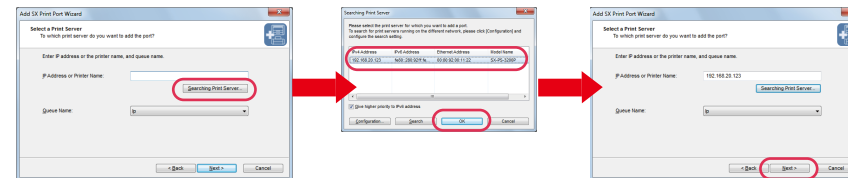


\* The IP Address can also be typed in the **IP Address or Printer Name** field.  
\* The screen may vary depending on the OS you are using.


- 12** Click **Next**.




- 13** Click **Finish**.



- 14** Select the driver of the printer SX-PS-3200P is connected to and click **Next**.




- 15** Click **Finish**.



The application installation and printing setting have been completed.

If you use SX Monitor utility which came with SX Print, you can always monitor the printer remotely on your PC.

How to start SX Monitor:  
Click **Start - All Programs - SX Print - SX Monitor**.  
To register the printer you wish to monitor, go to **Tools - Options**.



\* Some printer models may fail to retrieve the correct printer status information.

## Accessing User Manual

The CD-ROM that came with SX-PS-3200P contains the online manual. The online manual describes how to configure and use SX-PS-3200P as well as troubleshooting information that may help you to resolve possible problems. Follow the steps below to open the online manual.

- 1** Insert the CD-ROM (**SX User Software**) into your PC.

- 2** Please select **Manual** from the menu.

\* If the menu screen does not appear automatically, open **My Computer**, select the CD-ROM drive and execute **Autorun.exe**.

- 3** Online manual will be displayed.

## Troubleshooting

Follow the steps below if you have any problems regarding the setup.

- 1 Refer to the Troubleshooting in the online manual.**  
(See the instruction on the left for how to access the manual.)

- 2 Refer to the FAQ in our homepage.**

- 3 Contact our customer support center.**

### Customer Support

**USA : silex technology america, Inc.**

E-mail : support@silexamerica.com  
URL : http://www.silexamerica.com/  
Phone : +1-866-765-8761

**Europe : silex technology europe GmbH**

E-mail : support@silexeurope.com  
URL : http://www.silexeurope.com/  
Phone : +49-(0)2151-65009-0